

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number
WO 2005/070838 A1

(51) International Patent Classification⁷: C02F 3/30

(21) International Application Number:
PCT/JP2005/000252

(22) International Filing Date: 20 January 2005 (20.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04290157.9 21 January 2004 (21.01.2004) EP

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: KISHI, Hiroshi [JP/JP]; 1-9-10-702 Yushima, Bunkyo-ku, Tokyo 113-0034 (JP).


Published:

— with international search report

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WATER TREATMENT BY ACTIVATED SLUDGE

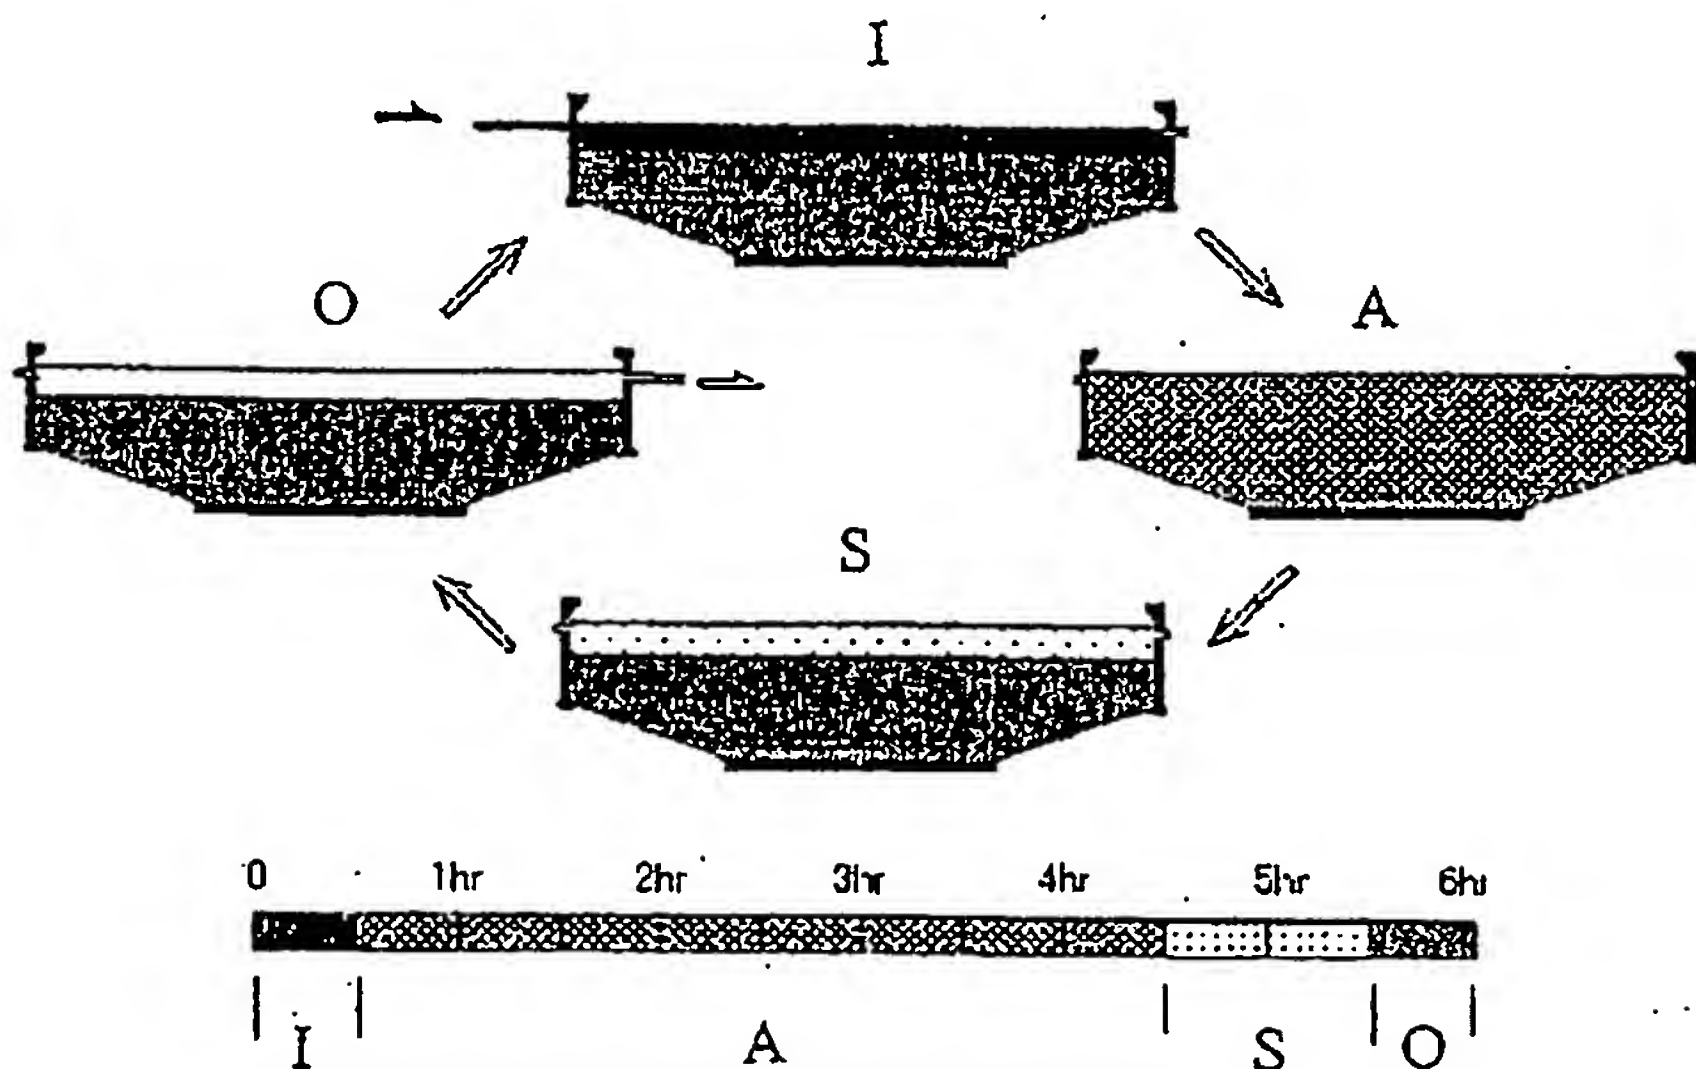

(57) Abstract: The invention relates to a method of treating water with activated sludge containing micro-organisms. The method comprises the steps of: preparing an environmentally adapted biomass mixture by adapting the activated sludge to a quantity of water having given characteristics in a single reactor under first levels of aeration, whereby the environmentally adapted biomass mixture acquires the capacity to cause concurrent reactions for BOD removal, nitrification and de-nitrification; and treating a portion of water having substantially the same given characteristics with the environmentally adapted biomass mixture capable of causing the concurrent reactions, in the single reactor under a second level of aeration not higher than the first levels of aeration.

BEST AVAILABLE COPY